Smoke Detector

ASD-56

Reset button - - - - - - - - - -

GASDNA

Introduction

ASD-56 is a smoke sensor with AI algorithm.
Previous smoke sensors sometimes malfunction in dust and mist moisture.
However, ASD-56 is the world's first dual optical sensor to dramatically
improve sensor performance.

Characteristics

- Low Concentrated Smoke Detection

  Designed to assist the safety functions of precise industrial automation equipment,
  it is suitable for detecting trace amounts of smoke.

- Digital Process

  Various artificial intelligence is provided by the processor to optimally configure
  detection and alarm functions to maximize detection effects.

- Dual Optical Smoke Sensor

  If the surrounding air contains a constant concentration of smoke, the optical smoke sensor,
  which uses changes in the amount of light electricity in contact with the photoelectric
  device by smoke, is very sensitive and can quickly detect even low concentrations of smoke.
  It also has built-in capabilities to avoid ambient noise and malfunction alarms.

- Thermistor Sensor

  Thermistor sensor composed of sintered semiconductor material that shows a large
  change in resistance in proportion to a small change in temperature.

Specification

Item	ASD-56
Detection Principle	Dual Optical Smoke Sensor, Thermistor Sensor
Detect Method	Non Verification Type or (70℃ or Higher)
Response Time	Within 3 sec
Output	Relay A(DC30V 1A), Relay B, RS485 MODBUS
Input	DC 22~26V
Currency Consumption	24V 60mA(MAX)
Housing	ABS
Operation Temp. & Moisture	-35~80℃, 0~95% RH (Non-Condensing)
Process	AI Algorithm
Reset Switch	Press reset switch and return to normalization

SENSOR UNIT
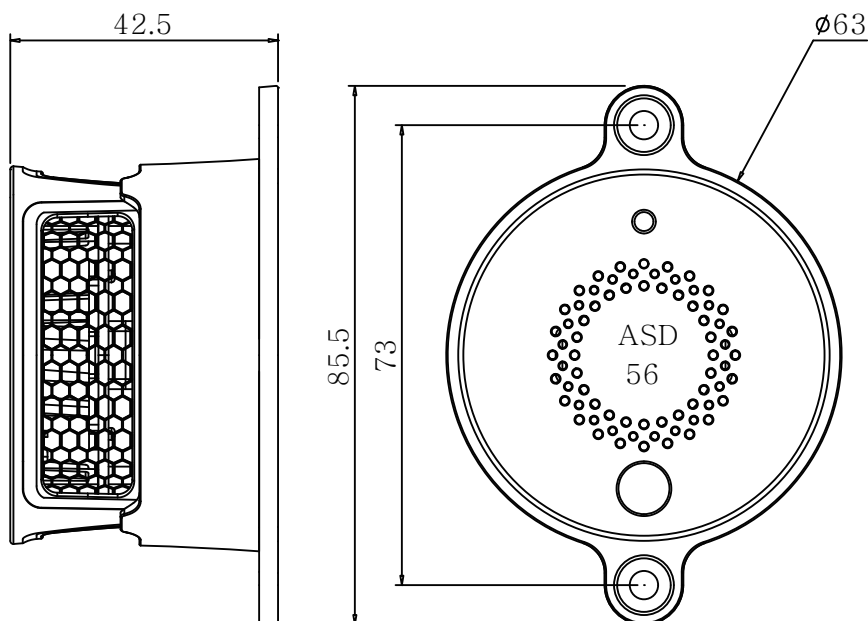
Wiring

NO	Label	Color	Purpose
1	P24	RED	POWER(+24V)
2	N24	BLACK	POWER(0V)
3	FG	GREEN	EARTH
4	TX+	WHITE	RS485 TX+
5	TX-	BLUE	RS485 TX-
6	NC	ORANGE	RELAY NC
7	COM	BROWN	RELAY COM
8	NO	YELLOW	RELAY NO

ASD
56

P24 RED
N24 BLACK
FG GREEN
TX+ WHITE
TX- BLUE
NC ORANGE
COM BROWN
NO YELLOW